
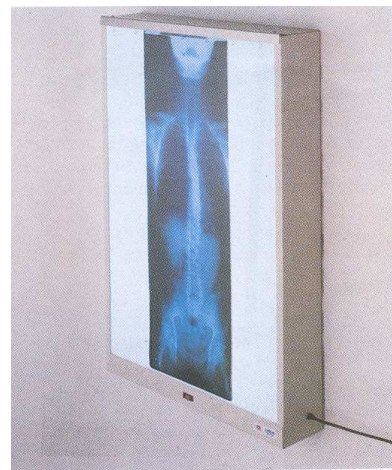
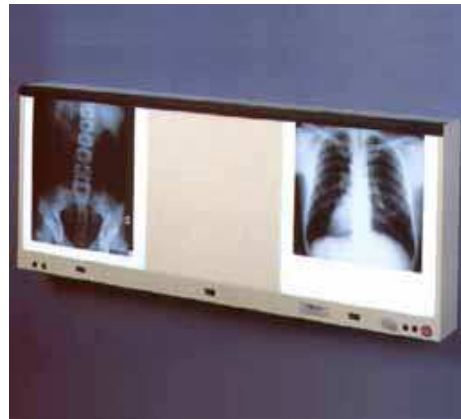


## TECHNICAL DATA-SHEET

### X-RAY FILM VIEWER HIGH FREQUENCY SERIES

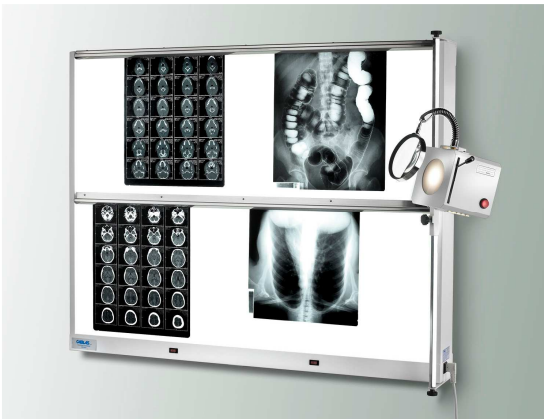

- Stove enamelled steel structure thickness 0,8 mm;
- Fire epoxy painting colour peel RAL 9010;
- Smelted opaline acrylic screen thickness 3 mm inserted into the structure;
- Neon tubes of 6.000°Kelvin (other type of tubes available on request);
- Speed switching by electronic reactors of 40.000 Hz which avoid lamps flutter;
- Special electronic light regulator which allow a very good light regulation from 100% to 10%;
- Upper and/or central pressing rolls film holding system;
- Speed bipolar switches on the front (on request is possible to apply other type and/or their position);
- External fuses lagging type 5x20 (positioned on the bottom right side);
- Feeding cable complete with plug and earth "Italian" type cm. 180 long (on request it is possible to supply other type of cables) positioned on the bottom right side;
- Predisposed for wall installation through expansion dowels;
- Integrable with other optional devices like: lateral support for spot viewers and/or magnifying lens, trolley on wheels;
- The film viewer is compliant with Directive 93/42/EEC - Medical Devices - Class 1 also complies with Directive 73/23 EEC (Low Voltage) Directive 89/336 EEC (Compatibility Electromagnetic).  
The construction complies with EN 60601 1.2 / DIN 6856 -1
- Can be installed in rooms as medical use (CEI 64-4)
- Feeding 230V / 50Hz + earth;
- Maintenance: recurrent cleaning (each 6 months) of the whole screen and tubes replacement each 5.000 hours of use;

## TECHNICAL DATA - SHEET

### HORIZONTAL SECTIONS HEIGHT 43 CM

CODE	SIZE	OUTSIDE DIMENSION cm.	WEIGH Kg.	NUMBER OF TUBES	LIGHT SECTION	W	A	FUSIBILI	CD/MQ
M-NF-010	40 X 43	45 X 52 X 11	6,8	4 – 15 W	1 – 40 X 43	72	0,4	1	2200
M-NF-100	70 X 43	78 X 52 X 11	12,0	4 – 15 W	1 – 70 X 43	95	0,5	1	2600
M-NF-110	90 X 43	95 X 52 X 11	12,8	4 – 30 W	1 – 90 X 43	118	0,6	1	2700
M-NF-120	120 X 43	125 X 52 X 11	16,5	4 – 36 W	1 – 120 X 43	142	0,7	1	2800
M-NF-150	150 X 43	155 X 52 X 11	19,5	4 – 58 W	1 – 150 X 43	222	1	2	3000

### HEIGHT HORIZONTAL SECTIONS OVERLAPPING CM 86

M-NF-2000	90 X 86	95 X 99 X 11	25	8 – 30 W	2 – 90 X 43	236	1	2	2700
M-NF-2010	120 X 86	125 X 99 X 11	30	8 – 36 W	2 – 120 X 43	284	1,3	2	2800
M-NF-2020	150 X 86	155 X 99 X 11	39	8 – 58 W	2 – 150 X 43	444	2	3	3000

### SECTIONS LIGHTS INDEPENDENT

M-NF-02	72 X 43	75 X 52 X 11	12,5	8 – 15 W	2 – 36 X 43	144	0,7	1	4000
M-NF-03	108 X 43	112 X 52 X 11	17,5	12 – 15 W	3 – 36 X 43	216	1	2	4000

### MODEL COMBINED WITH TWO SECTIONS OVERLAPPING

M-NF-20	108 X 86	113X102X111	48	24 – 15 W	3 – 36 X 43 1 – 108 X 43	432	2	3,15	4000
M-NF-21	144 X 86	148X102X11	64	32 – 15 W	4 – 36 X 43 1 – 144 X 43	576	2,6	3,15	4000

### MODEL VERTICAL

M-NF-300	30 X 90	35 X 98 X 11	11,5	2 – 30 W	1 – 30 X 90	59	0,3	1	3500
M-NF-600	60 X 90	65 X 98 X 11	13,5	4 – 30 W	1 – 60 X 90	118	0,6	1	3800
M-NF1200	60 X 120	65 X 128 X 11	16,5	4 – 36 W	1 – 60 X 120	142	0,7	1	3800